





# CHMT28 PICK AND PLACE MACHINE

- \* All-in-one Machine, 2 Placement Heads
- \* High speed mounting
- \* Full touch screen operation, no need external PC
- \* 17pcs feeders
- \* High quality Juki Nozzles
- \* Multi PCB assembly support
- \* 100% Good feedback

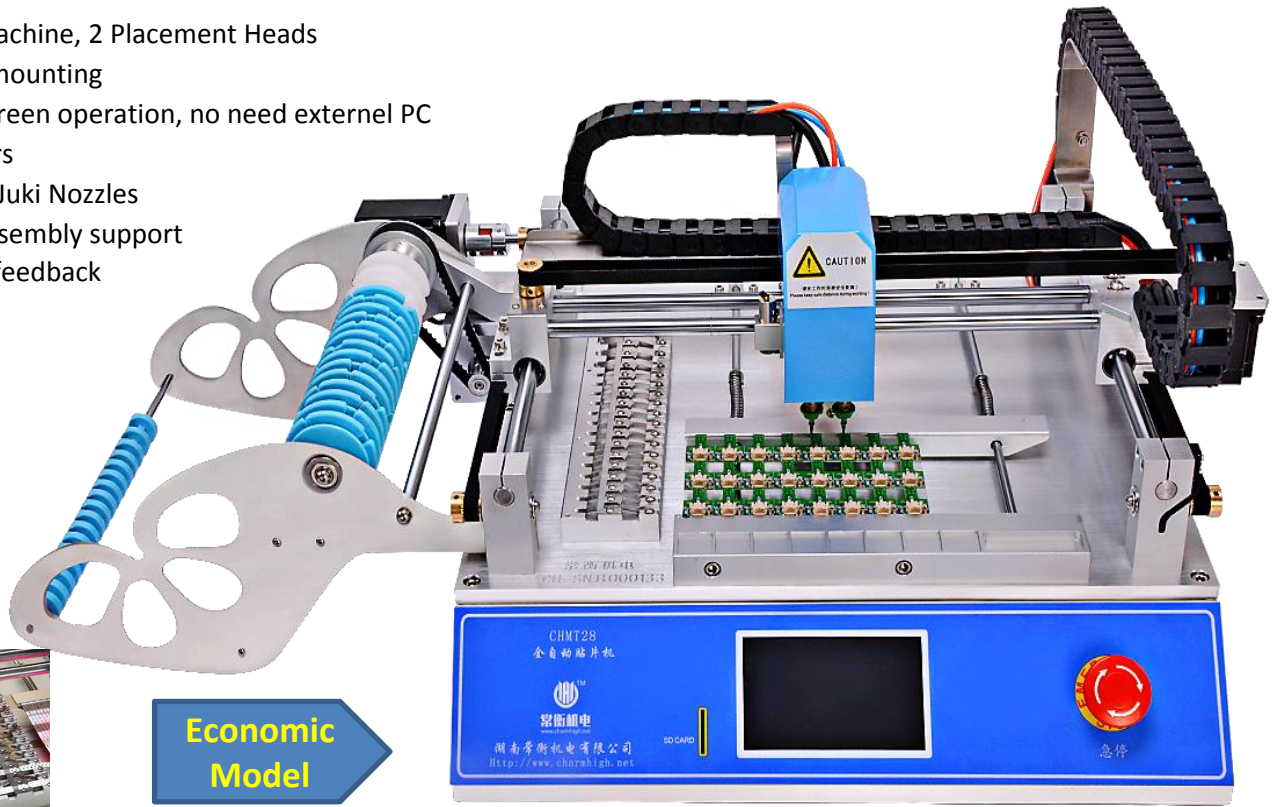

**Economic Model**



Stronger Axis lead screw



High quality Juki Nozzles



Full Touch screen operation



1-17pcs different width feeders



Complete tool box

Model	CHM-T28
XYZ Axis travel	280mm(X)*300mm(Y)*15mm(Z)
PCB max size	255mm(L) * 275mm(W)
Support components	LED,0402-5050, SOP, QFN etc.
Mounting speed	6000cph;
Precision	±0.025mm
Placement head	2 heads
Feeding system	17pcs feeders(8mm 14pcs; 12mm 2pcs; 16mm 1pcs) ; 8pcs bulk IC front tray;
Demension	960mm(L)×705mm(W)×335mm(H)
Touch Screen	7 inches industry LCD screen
Main board	High-reliability industry motherboard
Vacuum air pump	in-build 2 vacuum pump (mute type)
Support work file	CSV file
Power supply	AC220V 50Hz / AC110V 60Hz
Power	250W
Net weight	52Kg

## CHARMHIGH TECHNOLOGY LIMITED

5th floor Longshenggaoke Bd, Huangbao Rd(W), Tianxin District, Changsha, Hunan, China

Email: charmhigh@126.com ; Kimi@charmhigh-tech.com ; Mobile No: +86 135 106 75756 ; skype: kimiliu89